



SMART WiFi TRILOGY CCT DOWNLIGHT

SERIES 2

Biorhythm to simulate natural daylight



WiFi
NO HUB REQUIRED

works with the
Google Assistant

WORKS WITH
alexa

Works with
IFTTT

220-240V
AC

8W
750lm

BIORHYTHM

TUNEABLE
CCT

DIMMING

100°
BEAM
SPREAD

90mm

IP44
RATED

IC-F
ABUTTED &
COVERED

IC-4

5YR
WARRANTY

Experience light that feels natural, from the warm white of a relaxed evening to cool daylight and control your lights from anywhere via app or voice control. Create schedules & timing to automate your home. The Trilogy WiFi Downlight is a simple and flexible colour temperature tuneable light fitting.

- Biorhythm gradually increases brightness and colour temperature to promote wakefulness and focus during the day before decreasing them to feel more relaxed and ready to sleep at night.
- Adjust the colour temperature and dim to suit.
- Change the colour temperature from a warm 3000K to a natural light 5000K.
- Provides a wide diffusion of clear, crisp light from an 8W LED light source.
- Fits in to standard 90mm cut-outs, perfect for new or retro-fit installations.
- Internal driver with flex & plug. (Total length 1.0 metre).
- Easy to connect, group and control downlights.
- Dimmable via app and/or voice control through Amazon Alexa, Google Assistant or Siri.
- Compatible with BrilliantSmart devices via automation & IFTTT.

APPLICATIONS

- Biorhythm lighting feature simulates daylight from sunrise to sunset.
- Ideal for any residential or commercial interior space
- Complete home retrofit or new builds.
- Create in app automation, so lights come on based on certain behaviour, ie: when movement is detected via a sensor, the lights turn on automatically





SMART WiFi TRILOGY CCT DOWNLIGHT

SERIES 2

TECHNICAL SPECIFICATIONS

| | |
|--------------------------------|---|
| Operating voltage: | 220-240V / 50Hz |
| Class: | Class II (2) |
| Wattage: | 8W Total |
| Lumens: | 750 Max Lumens |
| Colour temperature: | Biorythm to simulate daylight from sunrise to sunset Change colour temperature between 3000K and 5000K |
| Beam angle: | 100 degrees |
| Colour rendering index: | ≥81 |
| Power factor: | ≥0.8 |
| Dimmable: | Yes via App |
| Rated lifetime: | 30,000hrs @25°C Ambient (When covered with thermal insulation) |
| Cutout size: | ø90mm |
| Ingress protection: | IP44 rated (front face only) |
| Construction: | Polycarbonate with PS diffuser |
| Plug & cord: | 2-pin SAA approved, 1.0m length |
| Warranty: | 5 year replacement |
| WiFi Info: | IEEE802.11b/g/n, 2.4GHz Mac Encryption; WEP/WAPI/TKIP/AES |
| Device Requirements: | iOS 8.0 or higher, Android 4.1 or higher |
| Standards: | AS/NZS 60598.1 AS/NZS 60598.2.2 |


INSTALLATION

Must be installed by a licensed electrician

ACCESSORIES

sold separately

| | |
|-------------------|---------------------------------|
| Facia Ring | 20429SP001/06 black |
| | 20429SP001/13 brushed chrome |

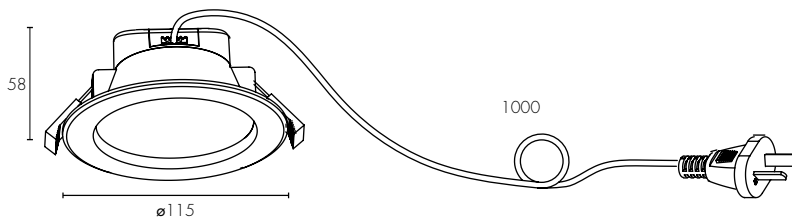

| | MODEL | COLOUR | DESCRIPTION | BOX SIZE | GROSS WEIGHT | BOX QTY | BARCODE/TUN |
|-------------------|----------|--------|--|-----------------------|--------------|---------|-------------------|
| RETAIL BOX | 22086/05 | White | Smart WiFi Trilogy CCT Downlight with Biorythm | W140 x H85 x D113 mm | 0.35 kg | 1 pc | 9 312641 220862 > |
| OUTER CTN | 22086/05 | White | Smart WiFi Trilogy CCT Downlight with Biorythm | W395 x H260 x D265 mm | 7.60 kg | 20 pc | 19312641220869 |