# **PSA Centrii**

# CEN27WSK

Smart Video Intercom System Door Camera & 7" WiFi Monitor



PSA's smart 7" video intercom system allows home owners to be connected and have the convenience of a monitor at home. Be notified, talk or unlock from the app anywhere or from the comfort of home on the monitor. SD card slot allows recording and digital photo frame function when an SD card is inserted.

#### **Features**

#### **Door station**

- · Metal IP65 weather rated door station designed
- 2MP HD camera resolution
- 110-degree wide angle view
- Night vision (IR LED) and illuminated push button
- Rain hood and angle bracket included

#### Monito

- 7" HD video monitor with WiFi (2.4GHz)
- 2-way audio communication with doorbell
- Door & Gate release
- Record images by motion detection when SD card fitted
- Easily mute the ringtone with shortcut button

## **Specifications**

Specifications		
MONITOR		
Display screen	7" TFT LCD screen	
Definition	7" (1024x600 pixels)	
Video Standard	PAL	
Wi-Fi	2.4GHz only (CEN27WM)	
Calling mode	Two-way conversation	
Calling time	120s	
Standby current	Maximum 250mA	
Working current	Maximum 600mA	
Power supply	External switching power supply (DC 15V)	
Work temperature	0~+50°C	
Mounting	Surface mount	
Picture format	JPEG standard format	
Extension memory	MicroSD card	
(Optional)	(max 128GB, >Class 10, FAT32 format)	
Dimension	127.5H x 190.5W x 22D mm	
Digital Photo Frame	Yes (Displays photo from MicroSD Card)	
Custom Ringtone	Yes (Users MP3 files only on SD Card)	
Missed Call	Missed call indicator. Clock function needs to be activated.	
Motion Detection	Video recording when MicroSD card installed (MicroSD card not supplied)	
Cable	CAT5e/CAT6	
Cable Distance	Max 60m from door to last monitor Use cable pairing as per manual	
Warranty	2 Years	



# **PSA Centrii App**

Free app provided, support remote viewing on iOS or Android





# **Specifications**

opecinications		
DOOR STATION		
Camera sensor	2.0MP 1/3" CMOS	
View angle	110°	
Definition (Hor.)	1080P	
LEDs for night	IR LEDs(120°)	
Power consumption	150mA max.	
Power source	Supplied from indoor unit	
Operation temp.	0~+50°C	
Installation	Surface mounted	
Lock	N/O, N/C Contact (30VDC 2A)	
Ingress Protection Rating	IP65	
Angle Bracket	Included	
Dimensions	130mm (H) x 41.5mm (W) x 27mm (D)	
Warranty	2 Years	

Specifications may change without notice

### Kit Includes

- 1 x 2MP Surface Door Station (CEN27DS/2)
- 1 x 7" Monitor with Wi-Fi Master (CENT27WM)
- 1 x 15VDC Power Supply for Monitor

### **Accessories**

Optional

#### CEN27WMS

7" Slave Monitor (no Wi-Fi)



#### CEN27DS/2

2MP Surface Door Station with Angle Bracket & Rainhood



#### CEN27DSF/2

2MP Flush Door Station with Wall Box (stainless steel) Wallbox: 172H x 112W x 45D mm

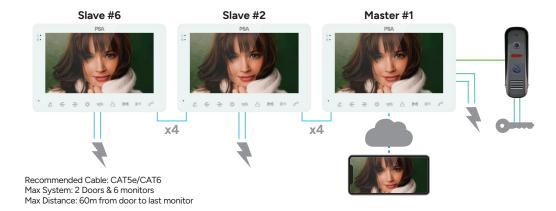


Plate: 191H x 132W x 2D mm

#### GEMGK310

12/24VDC Electric Door Strike

# **Wiring System**



Item Code	CEN27WSK	
Description	Smart Video Intercom System - Door Camera & 7" WiFi Monitor	
Carton Qty	1	10
Barcode	9318475002414	19318475002411

