

PSA Centrii

CENIPCT528DL2

5MP Smart Dual Light Turret
Network Camera



CENIPCT528DL2 CENIPCT528DL2B (black)

PSA's dual light turret cameras allow full colour vision at night when human intrusion is detected. The activation of the light also acts as a deterrent.

Features

- 1/3" progressive scan CMOS
- 2.8mm fixed lens
- Max resolution 2560×1920@20fps
- DWDR, 3D DNR, HLC, BLC, Defog
- Support intrusion and line crossing based on human detection
- Built-in IR LED and white lights, IR distance up to 20m, white light distance up to 20m
- 12V DC/PoE power supply
- IP66

Specifications

Camera	
Image Sensor	1/3" Progressive Scan CMOS
Electronic Shutter	Auto/Manual, 1/5 ~ 1/20,000s
Min. illumination	Color: 0.1 Lux @ (F1.6, AGC ON), 0 Lux with illumination on
S/N Ratio	55 dB
Day & Night	IR cut filter
Wide Dynamic Range	DWDR
Illumination Distance	IR distance up to 20m (66.61 ft) White light distance up to 20m (66.61 ft)
Illumination On/Off Control	Auto/Manual
Pan/Tilt/Rotation Range	Pan: 0° ~ 360°, Tilt: 0° ~ 75°, Rotation: 0° ~ 360°
Lens	
Lens Type	Fixed focal
Iris	Fixed Iris
Focal Length	2.8 mm
F Number	F1.6
Angle of View	H: 93.2°, V: 50.2°
Video	
Max. Resolution	2560(H)×1920(V)
Streaming Capability	2 Streams
Stream/Frame Rate	Main Stream: 2560×1920, 2560×1440, 2304×1296, 1920×1080, 1280×720, 704×576 @ 20fps Sub Stream: 640×360 @ 20fps
Bit Rate Control	CBR/VBR
Bit Rate	Main Stream: 512kbps ~ 6144kbps Sub Stream: 128kbps ~ 1536kbps
Image	
Image Adjustment	Brightness/Sharpness/Contrast/Saturation
White Balance	Auto/Manual
Mirror	Support
Exposure Mode	Auto/Manual
Day/Night Setting	Auto, Day, Night, Timing
Noise Reduction	2D/3D DNR
Image Enhancement	WDR, HLC, BLC, Defog
Privacy Masking	Support



PSA Centrii App

Free app provided,
support remote viewing
on iOS or Android



CENIPCT528DL2

5MP Smart Dual Illumination Turret Network Camera

Specifications

Audio	
Audio Compression	G.711 (64kbps)
Alarm Event	
Motion Detection	Support
Smart Function	Support intrusion and line crossing based on human detection
Network	
Protocols	IPv4, RTSP/RTP/RTCP, TCP/UDP,DHCP, DNS, DDNS, UPNP, ICMP, IGMP, NTP, SMTP, 802.1x, SNMP, HTTP/HTTPS, PPPOE
Front End Access Protocol	ONVIF, SDK
Max. User Access	4 Users
Web Viewer	<IE11, Chrome, Firefox, Microsoft Edge
Management Software	SunView
Interface	
Network Interface	1 Ethernet (10/100 Base-T) RJ-45 Connector
Microphone	Support
Reset Button	Support
SD Card Slot	Built-in, up to 256GB
General	
Power Supply	DC12V (-15%~+25%)/POE (IEEE 802.3af)
Power Consumption	Max 5 W
Operating Temperature	-25°C ~ 55°C (-13°F ~ 131°F)
Operating Humidity	Less than 90% RH
Ingress Protection	IP66
Certifications	CE/FCC
Casing	Metal + Plastic
Dimensions	Φ111 × 95mm
Net Weight	0.35 kg (0.77 lb)

Specifications may change without notice

Accessories

Optional

CENCBK646M

Junction Box



CENCBK202A

Pendant Cap




CENCBK501

Wall Mount



Dimensions

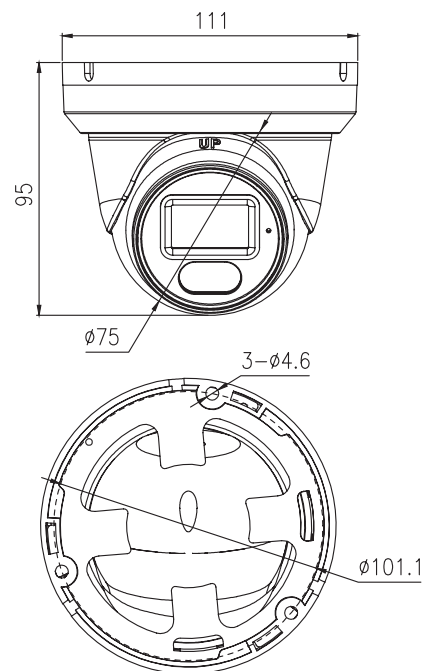

Item Code	CENIPCT528DL2		CENIPCT528DL2B (black)	
Description	5MP Smart Dual Illumination Turret Network Camera			
Carton Qty	1	20	1	20
Barcode	9318475002506	19318475002503	9318475002513	19318475002510