



PIXIE FLEXI SMART KIT - FLBP24VCCT/BTAM


PIXIE MASTER DEVICE - 2m or 5m smart CCT tunable COB strip kits, warm white to daylight

Application

Home theatre, bar features, decorative task illumination demanding smart controls

Design Specifications

- Smart LED strip kit, dimmable via a PIXIE secondary device, or the PIXIE PLUS app
- Dimming memory function
- High performance, stable, even light output, pre wired for easy installation, plug and play ready to use and cuttable every 30mm.
- NOTE: when cutting LED strip kits greater than 50% of the kit length, it is always important to calculate the remaining LED load to reconfirm its compatibility with the existing driver, as driver changes may be required with moderate reduction in loads.
- Heat-sink required for system performance, refer [LED channel options \(quick link\)](#)

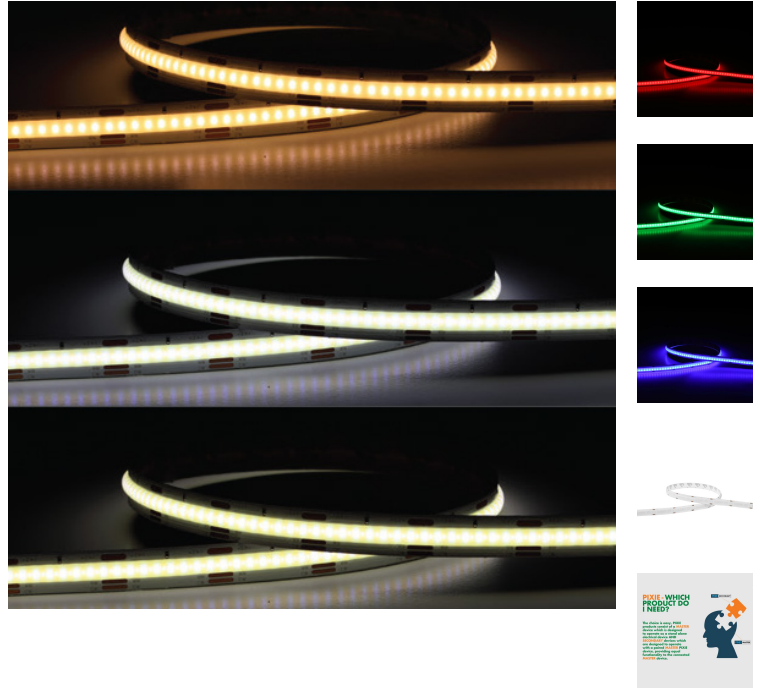

Performance

- Dimmable - **YES**
- Dimmer Type - **PIXIE**



Technical Specification

| Product | Model No. | Input Voltage (V/AC) | Beam Angle (°) | Body Colour | Dim (mm) | Watts per metre (W/m) |
|---------|------------------|----------------------|----------------|-------------|------------------------|-----------------------|
| | FLBP24V2CCT/BTAM | 240 | 115 | CLEAR | 2000(L) x 10(W) x 2(H) | 6 |
| | FLBP24V5CCT/BTAM | 240 | 115 | CLEAR | 5000(L) x 10(W) x 2(H) | 6 |

| CCT (K) | LEDs Per Metre | CRI |
|-----------|----------------|-----|
| 2700/6500 | 544 | 90 |
| 2700/6500 | 544 | 90 |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

PIXIE SMART HOME AUTOMATION.

