



FLICKER CONTROL SDD400SFI


Dimmable control with SFI flickerCONTROL technology, when paired with SAL SFI downlights

Application

Ideal for any residential or commercial interior spaces where nuisance ripple induced flicker is visible

Design Specifications

- Digital push button control, with three (3) complimentary key caps provided to suit most switch plates
- **Combined with the SAL SFI downlights Ecogem or Unifit series**, the new SFI dimmer eliminates nuisance ripple induced flicker between 750-1050Hz once and for all, typically found in QLD and NSW regions.
- Smooth dimming performance to 1.0% of light output
- PIXIE connectivity is achieved via the PIXIE / PIXIE PLUS app or paired secondary device
- Refer installation instructions for load compatibility chart.
- Need more info.....jump to the FAQ's on the SAL web and search SFI.

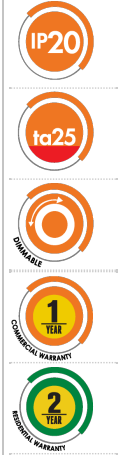

Performance

Dimmable - **YES**

Dimmer Type - **SFI Trailing edge SDD400SFI ONLY**

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Dim (mm)	Body Colour
SDD400SFI	240	250	42(L) x 24(W) x 24(H)	GREY

Patent pending

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

THE NEW ESS106 IS SMALL IN SIZE BUT BIG ON FEATURES.



For more
information
please
scan me

