



PLUTO 100FC - 12/24V 100W

Australian approved constant voltage flickerCONTROLLED driver, IP67

Application

An ideal choice for LED strips, LED Neon or exterior lighting requirements

Design Specifications

- SELV and EMC compliant
- Safe no load operation, power factor 0.9, non-dimmable
- Overload and short circuit protection, flickerCONTROLLED performance
- 1.2m flex and plug fitted for easy installation, output (secondary) end is provided with rubber fly leads
- Durable metal casing IP67
- Electrical class I, Do Not Cover.
Minimum load 100/12V 1 watt, 100/24V 1 watt Max.
LED Driver Number on MCB C type 16A (for driver >100W) = 23 (12V), 10 (24V)



Performance

- Dimmable - NO




Technical Specification

| Product | Model No. | Input Voltage (V/AC) | Frequency (Hz) | Output Voltage (V/DC) | Power (W) | Power Factor |
|---------|------------------|----------------------|----------------|-----------------------|-----------|--------------|
| | PLUTO 100/12V/FC | 240 | 50 | 12 | 100 | 0.95 |
| | PLUTO 100/24V/FC | 240 | 50 | 24 | 100 | 0.95 |

| Dimmable | Dim (mm) |
|----------|------------------------|
| NO | 170(L) x 61(W) x 34(H) |
| NO | 170(L) x 61(W) x 34(H) |



Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

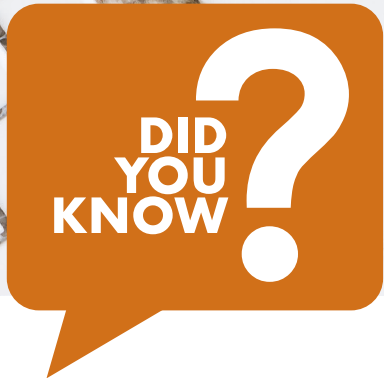

In the interest of safety and product performance, all electrical accessory components are covered by mandatory Australian and International Safety Standards. Always look out for the RCM logo on the product and if in doubt, check the compliance via your local Electrical regulator.

